


REVOLUTIONIZE YOUR DENSITY AND CONCENTRATION MEASUREMENT TECHNOLOGY

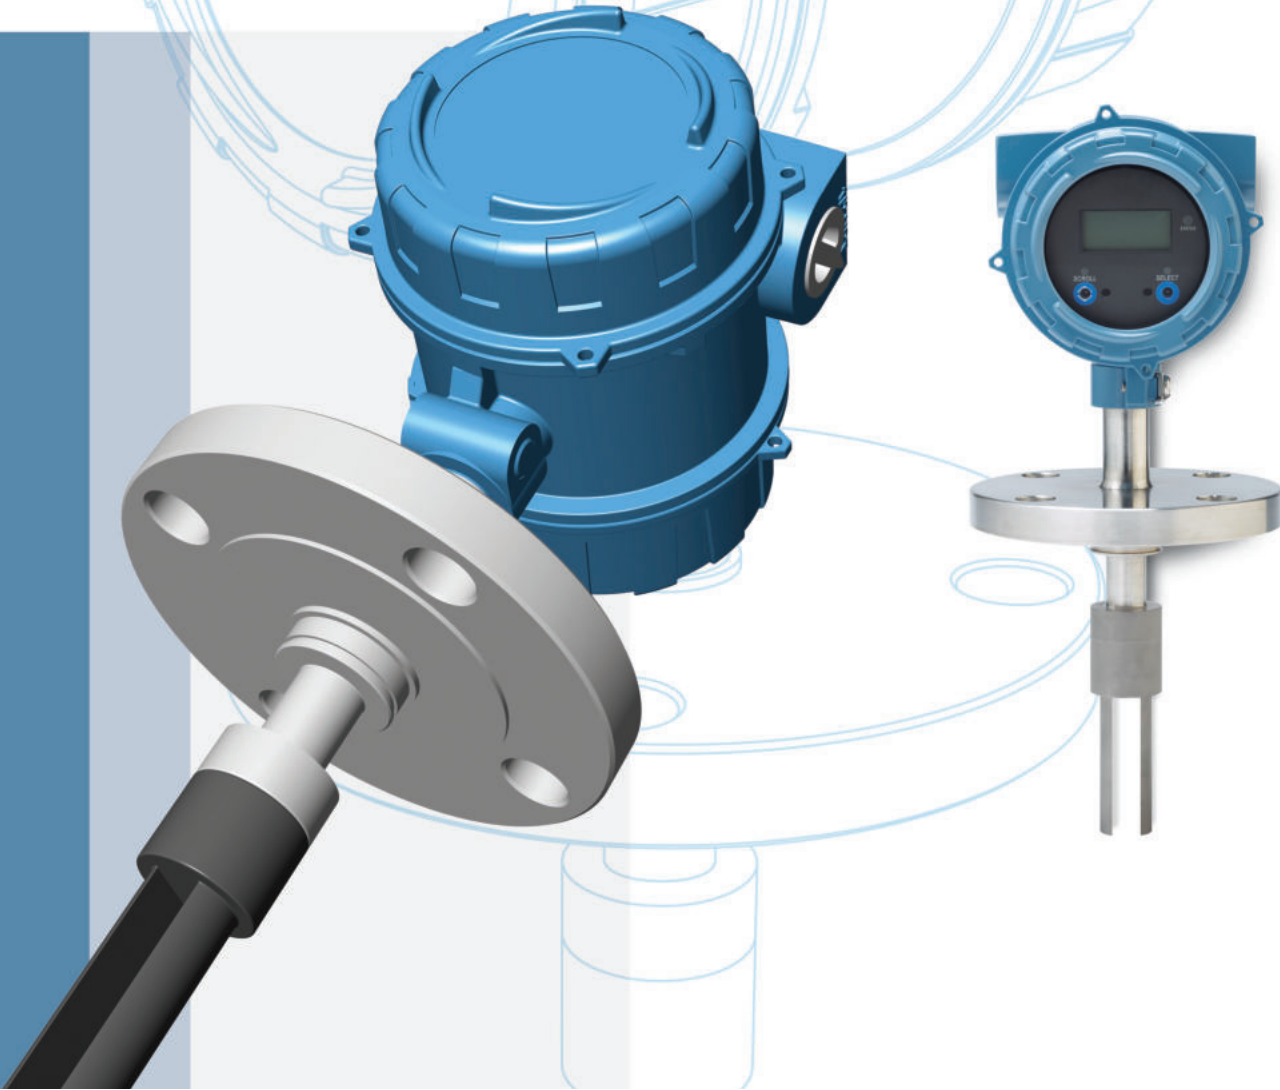

Micro Motion Fork Density Meter

INTRODUCING EMERSON'S MICRO MOTION® FORK DENSITY METER

Our Fork Density Meter (FDM) delivers accurate online density and concentration measurement using a direct insertion tuning fork design. This rugged and reliable meter raises the standard for inline density and concentration monitoring and enhances the interface detection, concentration control and blending operations of process fluids as diverse as refined hydrocarbons, mineral slurries and corrosive liquids such as acids and alkalis.

Density Measurement with Performance and Confidence

The combination of our industry-leading technology, wide breadth of products, unparalleled application expertise and customer support allows us to deliver unbeatable performance and value, time and time again.



The Micro Motion Fork Density Meter Delivers:

Superior Measurement Capabilities

- A rugged direct insertion sensor that provides the best, real-time measurement of density ($\pm 1.0 \text{ kg/m}^3$) and concentration ($\pm 0.1\%$)
- Multiple corrosion resistant materials for the most demanding process conditions
- Application flexibility with pipeline, bypass (fast) loop and tank installation support

A World-Class Leading Electronics Platform

- Local display and user interface that allows for simplified device management, minimizing maintenance requirements
- Simple integration into DCS, PLC and flow computers (Frequency/Time Period, Analog 4-20mA, HART, Modbus RS485, and FOUNDATION Fieldbus)
- Revolutionary device diagnostics and verification methods


Robust and Flexible Measurement

- Application-specific measurement and output configurations to ensure simple set-up and commissioning
- Optimized design; insensitive to vibration, temperature and pressure variations

PRODUCT HIGHLIGHTS


Application-Specific Configurations

Automatic, application-specific measurement and output configurations ensure simple set-up and commissioning

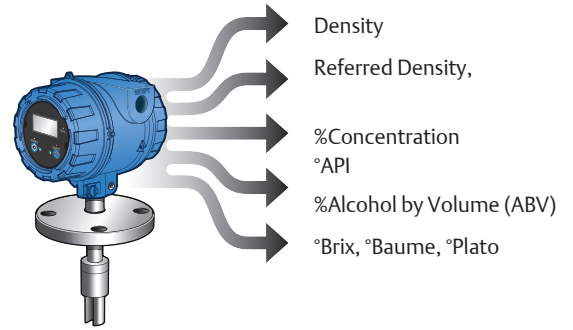


Meter Diagnostics

Built-in diagnostics for real-time monitoring and automated meter verification systems





Unrivalled Density Performance

A choice of installation options for replacement solutions give you the performance you need

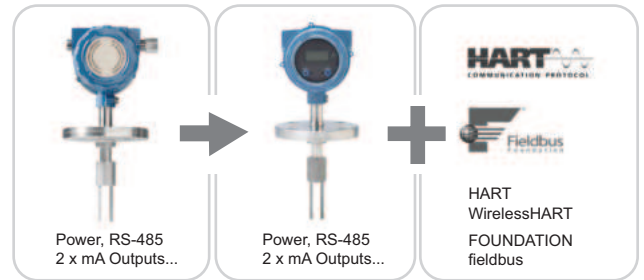

Interconnectivity


Integral HART I/O allows direct input of external temperature, pressure and flow measurements for enhanced outputs

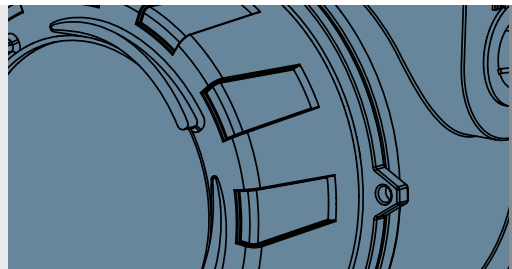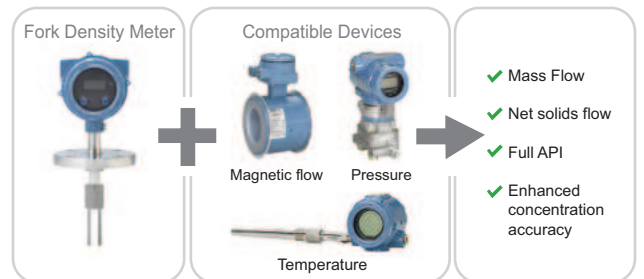

KEY APPLICATIONS


Pipeline & Terminals

- Interface and Product Detection**
 Improve cut-over accuracy and product quality determination to reduce scrap, waste or down-grading of multi-product pipelines
- Leak Detection**
 Improve leak detection thresholds and reduce false alarms

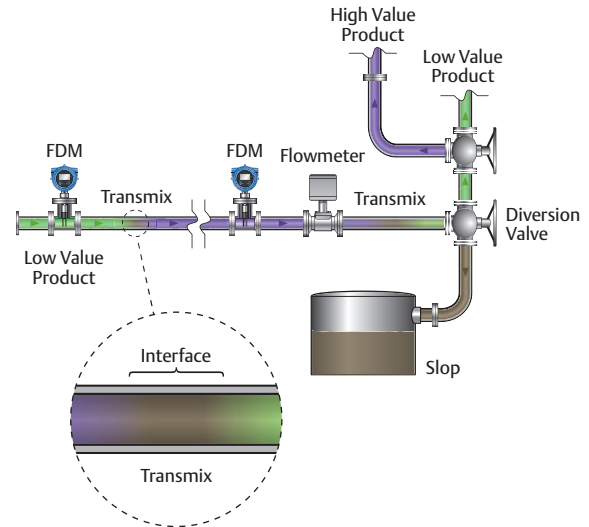


Refining, Chemical & Petrochemical

- Product Quality and Process Control**
 Optimize residence/cycle time while minimizing energy usage in condensers, contactors and reactors
- Blending and Concentration Control**
 Reduce waste, rework and giveaway with optimal feed and production fluid quality measurement

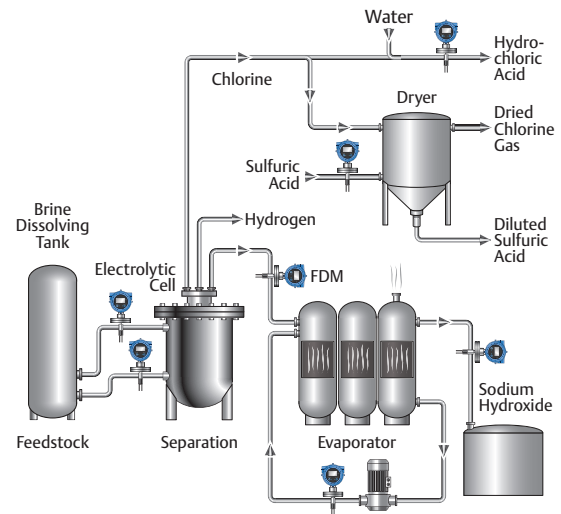

Power, Metals, Mining & Minerals

- Flue Gas Desulfurization (FGD)**
 Minimize raw material costs for optimized emissions and taxation reduction, and increased safety
- Mineral Slurries**
 Optimize end product efficiency through characterized slurry composition

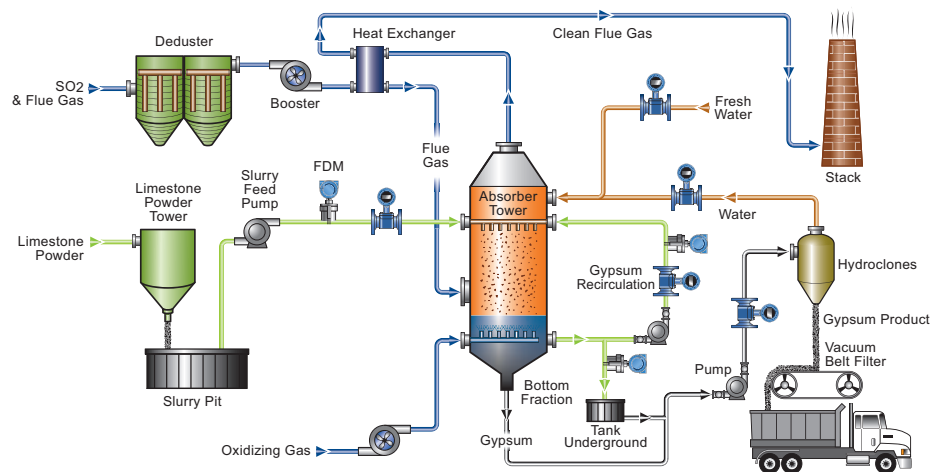



YOUR SOLUTION FOR THE
MOST DEMANDING PROCESS
APPLICATIONS



MICRO MOTION

For over 30 years, Emerson's Micro Motion has been a technology leader delivering the most precise flow, density and concentration measurement devices for fiscal applications, process control and process monitoring. Our passion for solving flow and density measurement challenges is proven through the highly accurate and unbeatable performance of our devices.



Fork Density Meter Specifications

Measuring Range	0-3000 kg/m ³ (0-3 g/cc)
Density Accuracy	±1.0 kg/m ³ (±0.001 g/cc) Equivalent to: ±0.5° API, ±0.2° Brix, ±1.0% ABV, ±0.1% Conc.
Temperature Accuracy	BS1904, DIN 43760 Class 'B' (±0.30 ±0.005 X T)°C
Safety Approvals	ATEX, CSA, IECEx (Explosion/Flame-Proof) – Zones 1 & 2
Display	Two-line, LCD screen Optical switch configuration
Outputs	Standard: Time Period, 4-20mA, HART, Modbus RS-485 Optional: FOUNDATION™ fieldbus, WirelessHART™
Protection Class	Ingress Protection: IP66/67, NEMA4 EMC compliant with EN61326
Dimensions	355 mm (h) x 163 mm (w) x 163 mm (d) (Typical short stem version)
Weight (Typical)	6.7 kg (15 lbs)



					
Compact Density Meter Peak Performance Precision Density Meter	Fork Density Meter Direct Insertion Density Meter	Gas Density Meter Fiscal Gas Density Meter	Specific Gravity Meter Gas Specific Gravity /BTU Meter	Fork Viscosity Meter Multi-Variable Viscosity Meter	Heavy Fuel Viscosity Meter Multi-Variable Marine & Power HFO Viscosity Meter

For more information, please visit: www.MicroMotion.com/density

©2017 Micro Motion, Inc. All rights reserved. The Emerson logo is a trademark and service mark of Emerson Electric Co. Micro Motion, ELITE, ProLink, MVD and MVD Direct Connect marks are marks of one of the Emerson Process Management family of companies. All other marks are property of their respective owners.

Emerson Automation Solutions Americas
7070 Winchester Circle
Boulder, Colorado USA 80301
www.MicroMotion.com
www.Rosemount.com
T: +1 800 522 6277
T: +1 (303) 527 5200
F: +1 (303) 530 8459

Mexico T: 52 55 5809 5300
Argentina T: 54 11 4837 7000
Brazil T: 55 15 3413 8000
Venezuela T: 58 26 1300 8100
Chile T: 56 2 2928 4800

Emerson Automation Solutions Europe/Middle East

Central & Eastern Europe T: +41 41 7686 111
Dubai T: +971 4 811 8100
Abu Dhabi T: +971 2 697 2000
France T: 0800 917 901
Germany T: 0800 182 5347
Italy T: 8008 77334
The Netherlands T: +31 70 413 6666
Belgium T: +32 2 716 77 11
Spain T: +34 913 586 000
U.K. T: 0870 240 1978
Russia/CIS T: +7 495 981 9811

Emerson Automation Solutions Asia Pacific

Australia T: (61) 3 9721 0200
China T: (86) 21 2892 9000
India T: (91) 22 6662 0566
Japan T: (81) 3 5769 6803
South Korea T: (82) 2 3438 4600
Singapore T: (65) 6 777 8211

